

ALUFORCE PRO 100 HC

ALUFORCE PRO 100 HC

P130Z3003306XXMY

Single step, sit-sit height mechanically adjustable

Height (mm)	min. 680 / max. 1130
Stroke (mm)	450
Speed (mm)	6/ crank turn
Width (mm)	min. 1100 / max. 1700
Depth of feet (mm)	660
Capacity (kg)	dynamic 60 / static 140
Noise dB(A)	-
Weight (kg)	21

Top supports & crossbars made of powder coated steel.

Available surface colors

Black, White, Silver



Optional Accessories

Cable tray	•
Bottom Crossbar Connection Set	•
Cable organizer	•

For further information see the accessories section of this catalogue



Packing dimension single unit


1110 x 260 x 160 (LxWxH - mm)

Packing dimension pallet (24 frames)

1140 x 1120 x 1080 (LxWxH - mm)



VISIONLIFT
INSIDE

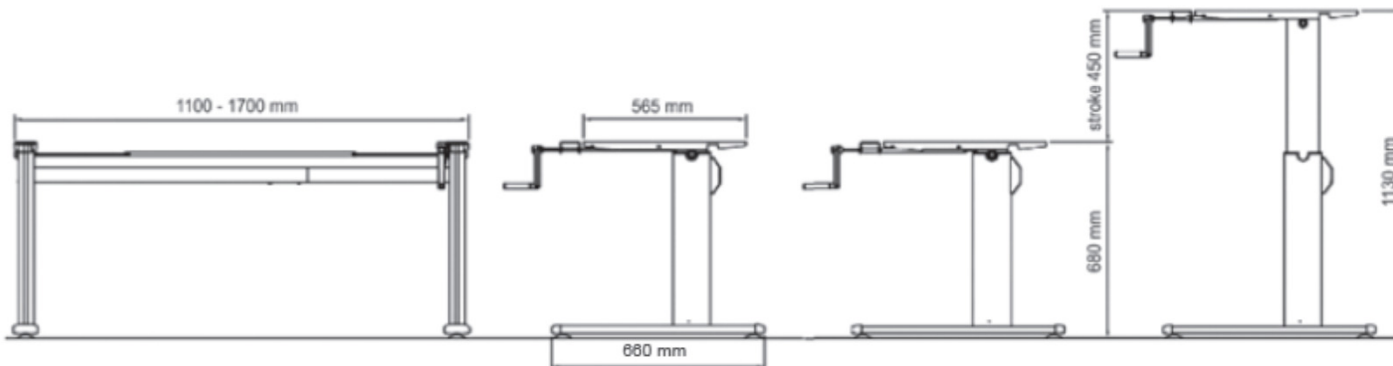

ALUFORCE PRO 101 HC 90°

ALUFORCE PRO 101 HC 90°

P330g3022306XXMY

Single step, sit-sit height mechanically adjustable

Height (mm)	min. 680 / max. 1130
Stroke (mm)	450
Speed (mm/s)	4 / crank turn
Width main unit (mm)	min. 1180 / max. 1700
Width ancillary unit (mm)	min. 1300 / max. 1700
Depth of feet (mm)	660
Capacity (kg)	dynamic 60 / static 140
Noise dB(A)	-
Power	-
Plug type	-
Weight (kg)	30

Legs and feet made of aluminium.

Top supports & crossbars made of powder coated steel.

Available surface colors

Black, White, Silver



Optional Accessories

Cable tray	•
Bottom Crossbar Connection Set	•
Cable organizer	•

For further information see the accessories section of this catalogue

Packing dimension single unit

1180 x 350 x 190 (LxWxH - mm)

Packing dimension pallet (15 frames)

1140 x 1120 x 1070 (LxWxH - mm)



VISIONLIFT
INSIDE

